

# Technical Data Sheet


## D2As(P)1LBI

Basic materials for shading and processing of electric / electronic products such as TV, notebook, cell phone panel, tape, FPCB, battery pouch

### Applications and Features

- Processing and shading LCD module parts such as mobile phone, touch screen panel, LCD, LED
- Process and shading bases for tapes, paddy pouches and other electrical and electronic products

### Configuration

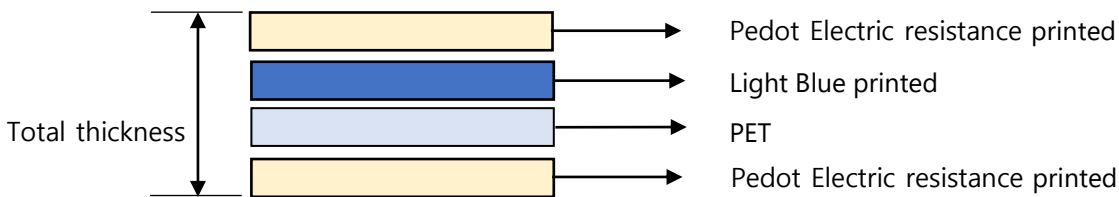

### Technical data

Test item	unit	Typical	Result	TEST METHOD
Total thickness	μm	-	B/F±3	Thickness gauge(1/1000)
PET	μm	-	-	
Transmittance	% 550nm	-	< 0.01	0.01 No Light Leakage
Electric resistance	Ω	-	10 <sup>5</sup> ~10 <sup>7</sup>	Resistance meter
Color	-	ΔL	-	Spectrometer
	-	Δa	-	
	-	Δb	-	

### Features & Benefits

- Print appearance compliance.
- shielding rate superiority
- In the post-process workability