

Technical Data Sheet


2HB

Basic materials for shading and processing of electric / electronic products such as TV, notebook, cell phone panel, tape, FPCB, battery pouch

Applications and Features

- Processing and shading LCD module parts such as mobile phone, touch screen panel, LCD, LED
- Process and shading bases for tapes, paddy pouches and other electrical and electronic products

Configuration

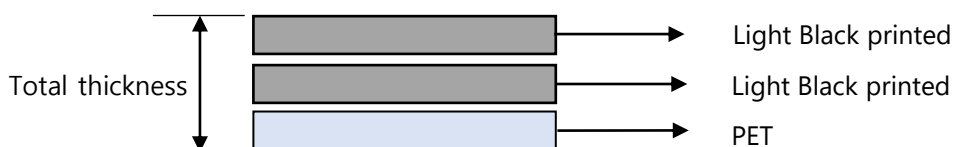

Technical data

| Test item | unit | Typical | Result | TEST METHOD |
|---------------------|---------------|------------------|-------------|-------------------------|
| Total thickness | μm | - | B/F \pm 2 | Thickness gauge(1/1000) |
| PET | μm | - | - | |
| Transmittance | % 550nm | - | < 0.01 | 0.01 No Light Leakage |
| Electric resistance | Ω | - | - | - |
| Color | - | ΔL | - | Spectrometer |
| | - | Δa | - | |
| | - | Δb | - | |

Features & Benefits

- Print appearance compliance.
- shielding rate superiority
- In the post-process workability